


Ceramic Trap Filters

XT Series Ceramic Trap Filters, DIP Type, 3.58MHz~6.5MHz

Features


- TV SIF stage use
- Low insertion loss
- Wide bandwidth Ceramic Trap
- RoHS Compliant
- Excellent spurious suppression characteristics
- Frequency: 3.58MHz~6.5MHz

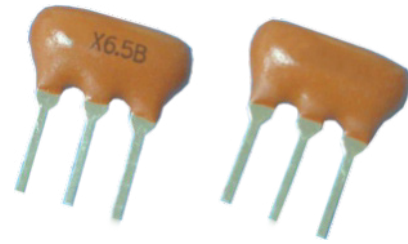

Standard Specifications (455KHz)

| Part Number | Trap Attenuation (at nominal frequency) (dB) | 20dB Attenuation Band Width (KHz) | 30dB Attenuation Band Width (KHz) |
|-------------|--|-----------------------------------|-----------------------------------|
| XT3.5MB | 25 | | ≥40(70) |
| XT4.43MB | 20 | | ≥50(80) |
| XT4.5MB | 35 | | ≥70(120) |
| XT5.5MB | 35 | | ≥90(120) |
| XT5.74MB | 35 | | ≥90(120) |
| XT6.0MB | 20 | | ≥90(120) |
| XT6.5MB | 20 | | ≥90(120) |
| XT4.5MB | 20 | ≥30 | 35 |
| XT5.5MB | 20 | ≥30 | 20 |

Dimensions [mm]

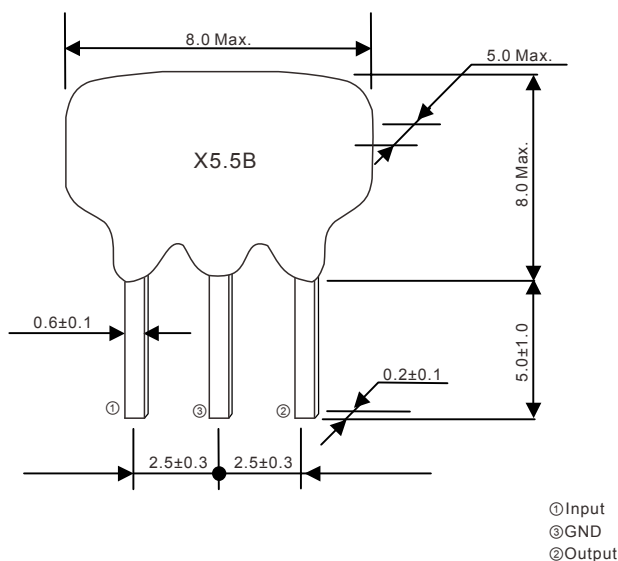

Characteristics

