

## Features

- 1-Port Resonator
- Ceramic Package for Surface Mounted Technology (SMT)
- Package size 3.8x3.8x1.5 mm
- RoHS compatible
- Package code DCC6
- Electrostatic Sensitive Device (ESD)




## Standard Specifications

P/N	Center Frequency (MHz)	Frequency Tolerance (KHz)	Insertion Loss (dB)	Package Code
R315	315	±30 / ±75	1.5	DCC6
R385	385	±30 / ±75	1.8	DCC6
R418	418	±30 / ±75	1.6	DCC6
R433	433.82	±30 / ±75	1.5	DCC6
R868	868.35	±75 / ±150	1.0	DCC6

For other frequencies and specifications, please contact our sales department.

## Dimensions [mm]

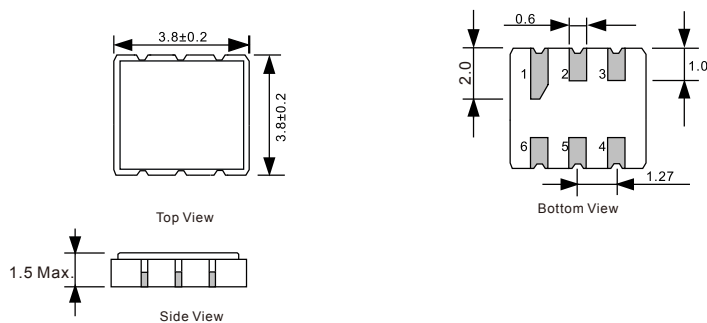

### Pin Function

Pin No.	Function
2	Input / Output
1 / 3 / 4 / 6	Case Ground
5	Output / Input