


## Features

- 1-Port Resonator
- Ceramic Package for Surface Mounted Technology (SMT)
- Package size 3.0x3.0x1.25 mm
- RoHS compatible
- Package code DCC6C
- Electrostatic Sensitive Device (ESD)

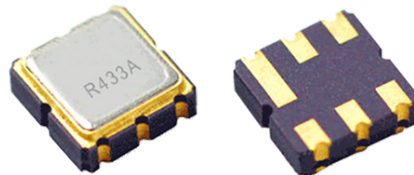


## Standard Specifications

P/N	Center Frequency (MHz)	Frequency Tolerance (KHz)	Insertion Loss (dB)	Package Code
R314.9	314.9	±30 /±75	1.4	DCC6C
R315	315	±30 /±75	1.4	DCC6C
R320	320	±30 /±75	1.5	DCC6C
R400	400	±30 /±75	1.61	DCC6C
R418	418	±30 /±75	1.6	DCC6C
R433.42	433.420	±30 /±75	1.4	DCC6C
R433	433.92	±30 /±75	1.4	DCC6C
R460	460	±30 /±75	1.4	DCC6C
R490	490	±30 /±75	1.4	DCC6C
R491	491.25	±30 /±75	1.8	DCC6C
R863	863.3	±75 /±150	1.1	DCC6C
R868	868.350	±75 /±150	1.0	DCC6C
R915	915	±75 /±150	1.2	DCC6C
R922	922.625	±75 /±150	1.0	DCC6C

For other frequencies and specifications, please contact our sales department.

## Dimensions [mm]

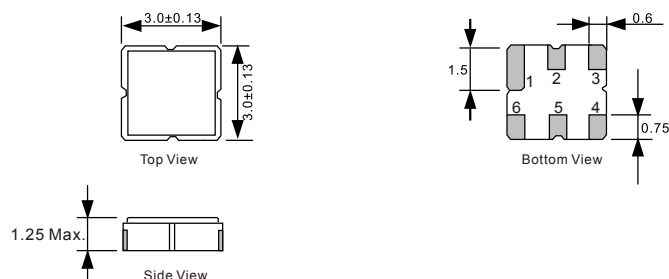

### Pin Function

Pin No.	Function
2	Input /Output
1 /3 /4 /6	Case Ground
5	Output /Input