


**Features**

- 1-Port Resonator
- Ceramic Package for Surface Mounted Technology (SMT)
- Package size 5.0x5.0x1.5 mm
- RoHS compatible
- Package code QCC8C
- Electrostatic Sensitive Device (ESD)

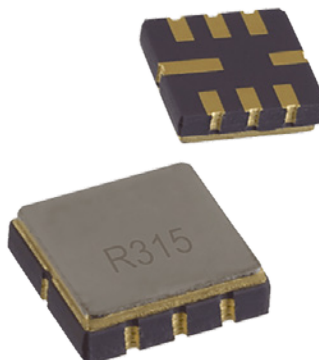


**Standard Specifications**

P/N	Center Frequency (MHz)	Frequency Tolerance (KHz)	Insertion Loss (dB)	Package Code
R299	299	±30 /±75	1.2	QCC8C
R303.825	303.825	±30 /±75	1.5	QCC8C
R303.875	303.875	±30 /±75	1.4	QCC8C
R304.3	304.3	±30 /±75	1.1	QCC8C
R315	315	±30 /±75	1.3	QCC8C
R330	330	±30 /±75	1.6	QCC8C
R358	358	±30 /±75	1.0	QCC8C
R370	370	±30 /±75	1.4	QCC8C
R390	390	±30 /±75	1.4	QCC8C
R403.22	403.22	±30 /±75	1.5	QCC8C
R403.55	403.55	±30 /±75	1.3	QCC8C
R433	433.92	±30 /±75	1.2	QCC8C
R434.42	434.42	±30 /±75	1.3	QCC8C
R868.35	868.35	±75 /±150	1.0	QCC8C

For other frequencies and specifications, please contact our sales department.

**Dimensions [mm]**

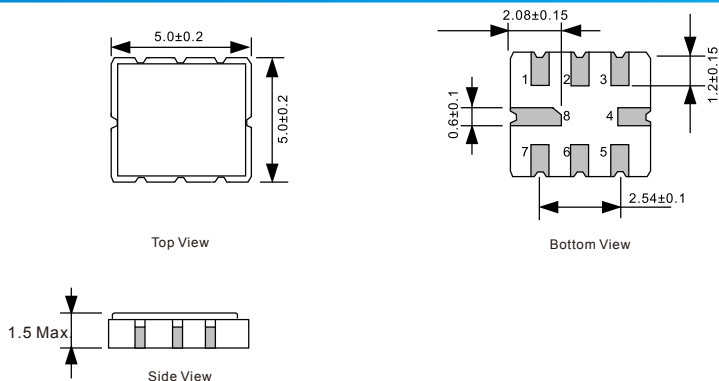

**Pin Function**

Pin No.	Function
2	Input /Output
6	Output /Input
1 /3 /5 /7	To be grounded
4 /8	Case Ground