


Product

LA1022P2450-A03

Specification

Frequency Range	2300~2600MHz
V.S.W.R	≤ 1.5
Impedance	50Ω
Gain	0~2 dBi
Azimuth	Omni-directional
Polarization	Linear
Impedance	50 Ω
Azimuth Beam width	Omni-directional

Dimension (mm)

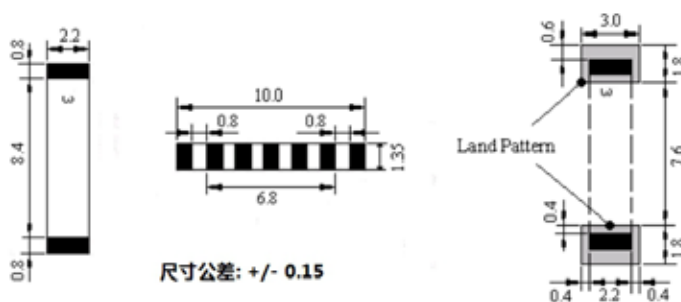

Test Graph

