



Product

LA31H2450-A29/M


Specification

Frequency Range	2410MHz~2490MHz
V.S.W.R	≤ 2.0
Impedance	50 Ω
Gain	6.62dBi
Azimuth	Omni-directional
Polarization	Linear
Impedance	50 Ω
Azimuth Beam width	Omni-directional

Dimension (mm)

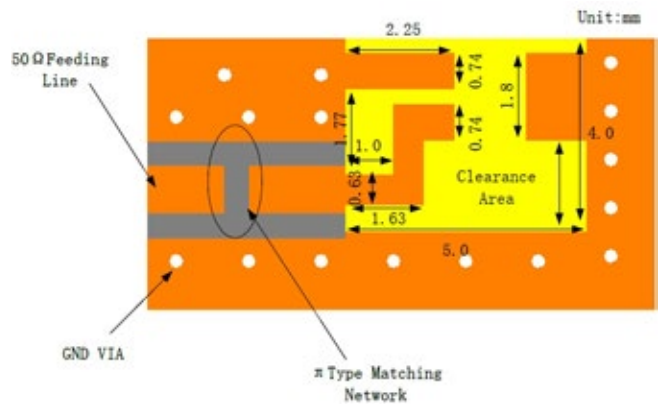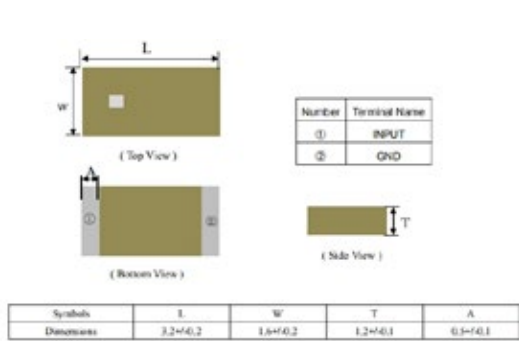

Performance

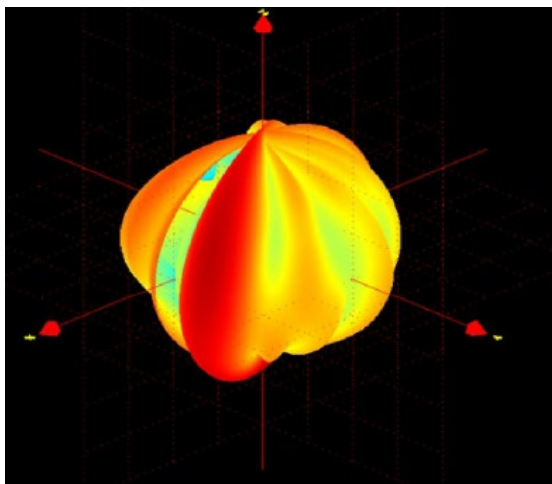

Test Graph

