



Product

LA31H2000-A48


Specification

Frequency Range	1900MHz~2100MHz
Return Loss	≥ 7.0dB
Impedance	50Ω
Gain	2.70 dBi
Azimuth	Omni-directional
Polarization	Linear
Impedance	50 Ω
Azimuth Beam width	Omni-directional

Dimension (mm)

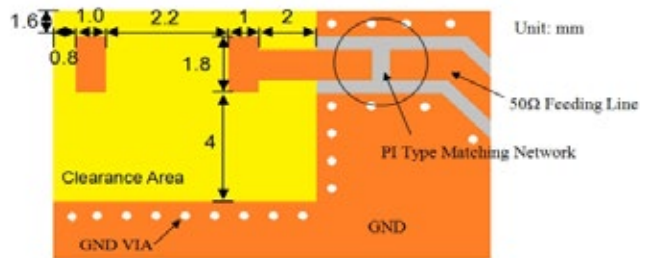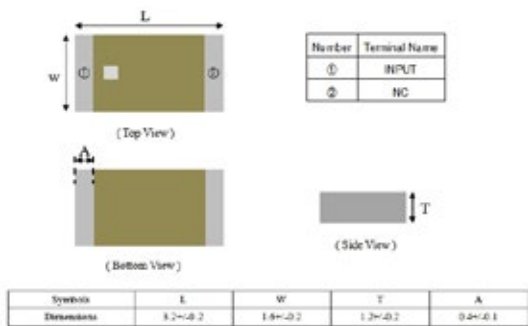

Performance

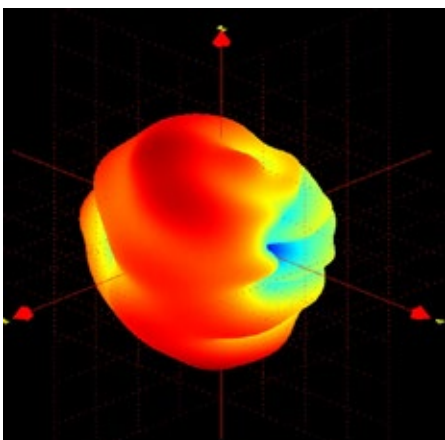

Test Graph

