



Product

LA31H2450-A71


Specification

Frequency Range	2400MHz~2500MHz
V.S.W.R (in BW)	≤ 2.0
Impedance	50Ω
Gain	2.01 dBi
Azimuth	Omni-directional
Polarization	Linear
Impedance	50 Ω
Azimuth Beam width	Omni-directional

Dimension (mm)

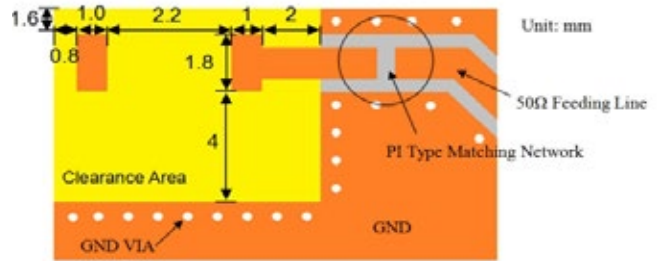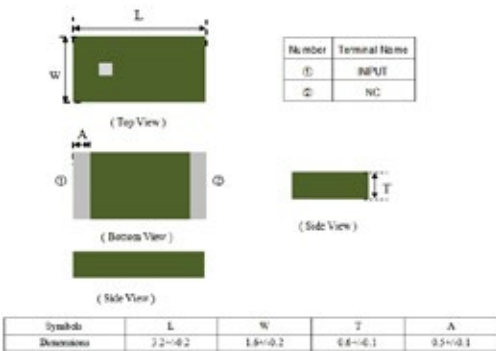

Performance

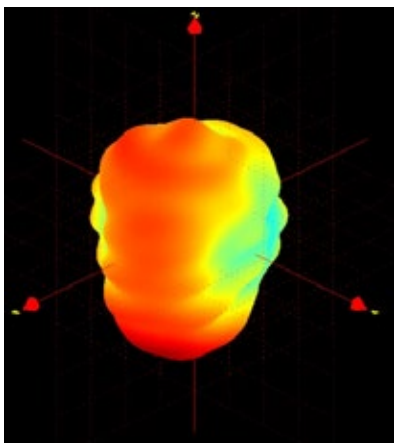

Test Graph

